


Correct Leg Placement

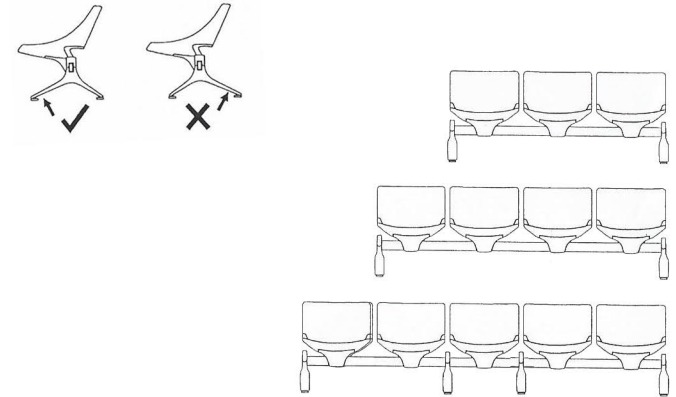

Tools Needed:

- Phillips Screwdriver
- Allen Wrench (included)

Instructions:

1.) Screw in the leveling glides to the support feet by hand. Then, set the beam on the support feet. Attach the beam to the support feet by threading the bolts through the underside of the support foot, through the beam and into the cap. The 5-Seater will have two additional support feet in the middle.

2.) Next, use the bolts provided to attach the seat brackets to the beam and insert the bolts into the seat shells to attach.